


KKMBJ...H42 45° Horizontal Bend

Overview:

Application
Diversions in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

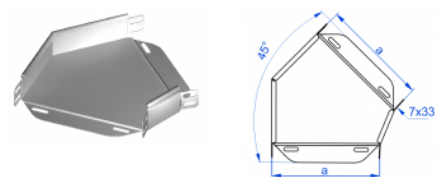

For installation use Screw Sets SGK M6×10 or SG M6×10.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBJ50H42	50	140104	20	0,11
KKMBJ100H42	100	140304	20	0,19
KKMBJ150H42	150	140504	10	0,36
KKMBJ200H42	200	140604	10	0,50
KKMBJ300H42	300	140804	10	0,87
KKMBJ400H42	400	147104	10	1,04
KKMBJ500H42	500	147204	10	1,22
KKMBJ600H42	600	147304	10	1,39

Connected products:

							
KAJ...H42 Cable Tray	KGL...H42 Cable Tray	KGJ...H42 Cable Tray	KGR...H42 Cable Tray	KCJ...H42 Cable Tray	KCL...H42 Cable Tray	KOL...H42 Cable Tray	KOJ...H42 Cable Tray
							
KBR...H42 Cable Tray	KBL...H42 Cable Tray	KBJ...H42 Cable Tray	OPZJ...H42 Horizontal Bypass	OPZBJ...H42 Horizontal Bypass	OPNJ...H42 Vertical Bypass	OPNBj...H42 Vertical Bypass	LUJ...H42 90° Vertical Bend
							
LUBJ...H42 90° Vertical Bend	LUMJ...H42 45° Vertical Bend	LUMBJ...H42 45° Vertical Bend	LUPJ...H42 90° Vertical Bend	LUMPJ...H42 45° Vertical Bend	TRSJ...H42 Vertical Tee - Crosswise	TRSBj...H42 Vertical Tee - Crosswise	SG... Screw Set
							
SM... Screw Set							