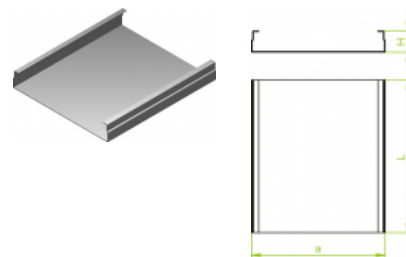


KN Underfloor Trunking

Overview:

- Application**
Routing underfloor cable runs
- Material**
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)
- Available to order:**
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)





Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KN 175H38/2	2000	175	530117	6	2,24	6450
KN 175H38/3	3000	175	530217	6	2,24	6450
KN 190H38/2	2000	190	530119	6	2,36	7020
KN 190H38/3	3000	190	530219	6	2,36	7020
KN 240H38/2	2000	240	530124	6	2,76	8920
KN 240H38/3	3000	240	530224	6	2,76	8920
KN 340H38/2	2000	340	530134	4	3,56	12720
KN 340H38/3	3000	340	530234	4	3,56	12720

Connected products:

- 
LKn Vertical Bend 3 Comp.
- 
RKN Straight Reducer
- 
RKNd Straight Reducer 2 Comp.
- 
RKNt Straight Reducer 3 Comp.
- 
KNd Underfloor Trunking 2 Comp.
- 
KNt Underfloor Trunking 3 Comp.
- 
KKN 90° Horizontal Bend
- 
KKNd 90° Horizontal Bend 2 Comp.
- 
KKNt 90° Horizontal Bend 3 Comp.
- 
KKNM 45° Horizontal Bend
- 
KKNMd 45° Horizontal Bend 2 Comp.
- 
KKNMt 45° Horizontal Bend 3 Comp.
- 
TKN Horizontal Tee
- 
CZKN Horizontal Cross-over
- 
LKn Vertical Bend
- 
LKNd Vertical Bend 2 Comp.