

KNd Underfloor Trunking 2 Comp.

Overview:

Application

Routing underfloor cable runs


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

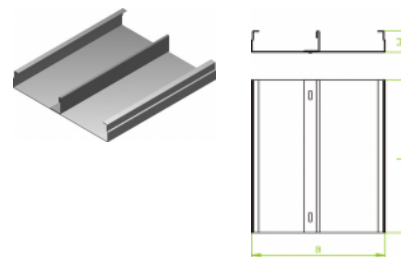

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNd 175H38/2	2000	175	530317	6	2,79	6450
KNd 175H38/3	3000	175	530417	6	2,79	6450
KNd 190H38/2	2000	190	530319	6	2,91	7020
KNd 190H38/3	3000	190	530419	6	2,91	7020
KNd 240H38/2	2000	240	530324	6	3,31	8920
KNd 240H38/3	3000	240	530424	6	3,31	8920
KNd 340H38/2	2000	340	530334	4	4,11	12720
KNd 340H38/3	3000	340	530434	4	4,11	12720

Connected products:



LKt Vertical Bend 3 Comp.




RKN Straight Reducer




RKNd Straight Reducer 2 Comp.



RKNT Straight Reducer 3 Comp.



KN Underfloor Trunking



KNT Underfloor Trunking 3 Comp.



KKN 90° Horizontal Bend



KKNd 90° Horizontal Bend 2 Comp.



KKNt 90° Horizontal Bend 3 Comp.



KKNM 45° Horizontal Bend



KKNMd 45° Horizontal Bend 2 Comp.



KKNMt 45° Horizontal Bend 3 Comp.



TKN Horizontal Tee



CZKN Horizontal Cross-over



LK Vertical Bend



LKd Vertical Bend 2 Comp.