

KNt Underfloor Trunking 3 Comp.

Overview:

Application

Routing underfloor cable runs

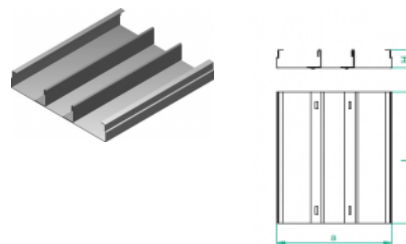
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)





Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KNt 175H38/2	2000	175	530517	6	3,34	6450
KNt 175H38/3	3000	175	530617	6	3,34	6450
KNt 190H38/2	2000	190	530519	6	3,46	7020
KNt 190H38/3	3000	190	530619	6	3,46	7020
KNt 240H38/2	2000	240	530524	6	3,86	8920
KNt 240H38/3	3000	240	530624	6	3,86	8920
KNt 340H38/2	2000	340	530534	4	4,66	12720
KNt 340H38/3	3000	340	530634	4	4,66	12720

Connected products:

							
LKn Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.	KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.
							
KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMd 45° Horizontal Bend 2 Comp.	KKNMt 45° Horizontal Bend 3 Comp.	TKN Horizontal Tee	CZKN Horizontal Cross-over	LKn Vertical Bend	LKNd Vertical Bend 2 Comp.