

KKNM 45° Horizontal Bend

Overview:

Application

Diversion in cable routing


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

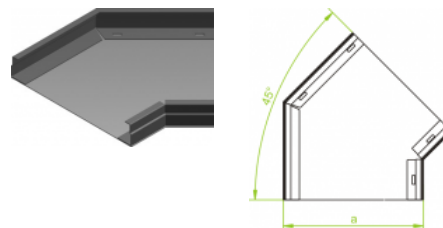

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKNM175H38	175	531017	4	0,59
KKNM190H38	190	531019	4	0,65
KKNM240H38	240	531024	4	0,83
KKNM340H38	340	531034	4	1,31

Connected products:



LKt Vertical
Bend 3 Comp.




RKN Straight
Reducer




RKNd Straight
Reducer 2
Comp.




RKNt Straight
Reducer 3
Comp.



KN Underfloor
Trunking



KNd Underfloor
Trunking 2
Comp.



KNT Underfloor
Trunking 3
Comp.



KKN 90°
Horizontal Bend



KKNd 90°
Horizontal Bend
2 Comp.



KKNt 90°
Horizontal Bend
3 Comp.



KKNMd 45°
Horizontal Bend
2 Comp.



KKNMt 45°
Horizontal Bend
3 Comp.



TKN Horizontal
Tee



CZKN Horizontal
Cross-over



LK Vertical Bend



LKd Vertical
Bend 2 Comp.