

KN Underfloor Trunking

Overview:

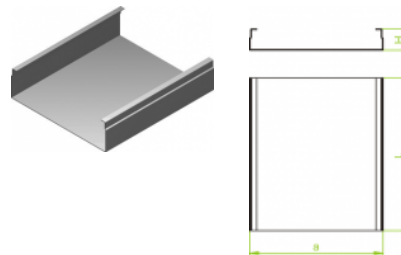
Application

Routing underfloor cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


Versions:

 Sheet thickness: **1,0 mm**



Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KN 175H48/2	2000	175	540117	6	2,40	8200
KN 175H48/3	3000	175	540217	6	2,40	8200
KN 190H48/2	2000	190	540119	6	2,52	8920
KN 190H48/3	3000	190	540219	6	2,52	8920
KN 240H48/2	2000	240	540124	6	2,92	11320
KN 240H48/3	3000	240	540224	6	2,92	11320
KN 340H48/2	2000	340	540134	4	3,72	16120
KN 340H48/3	3000	340	540234	4	3,72	16120


Connected products:



 KNd Underfloor
Trunking 2
Comp.

 KNT Underfloor
Trunking 3
Comp.

 KKN 90°
Horizontal Bend

 KKNd 90°
Horizontal Bend
2 Comp.

 KKNt 90°
Horizontal Bend
3 Comp.

 KKNM 45°
Horizontal Bend

 KKNMd 45°
Horizontal Bend
2 Comp.

 KKNMt 45°
Horizontal Bend
3 Comp.


 TKN Horizontal
Tee

 CZKN Horizontal
Cross-over


LK Vertical Bend


 LKd Vertical
Bend 2 Comp.

 LKt Vertical
Bend 3 Comp.

 RKN Straight
Reducer

 RKNd Straight
Reducer 2
Comp.

 RKNt Straight
Reducer 3
Comp.