

KKNMd 45° Horizontal Bend 2 Comp.

Overview:

Application

Diversion in cable routing

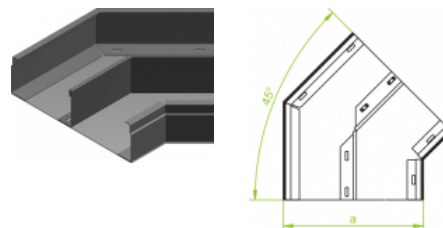
Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)





Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKNMd 175H48	175	541117	4	0,76
KKNMd 190H48	190	541119	4	0,84
KKNMd 240H48	240	541124	4	1,04
KKNMd 340H48	340	541134	4	1,58

Connected products:

							
KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMt 45° Horizontal Bend 3 Comp.
							
TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKd Vertical Bend 2 Comp.	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.