

LKd Vertical Bend 2 Comp.

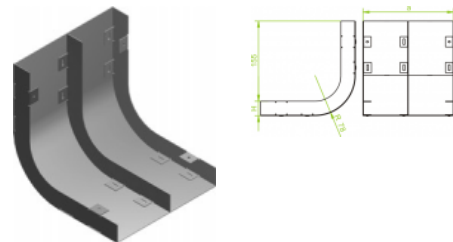
Overview:

Application
 Diversion in cable routing from the horizontal to the vertical plane

Material
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)

Cover included









Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LKd 175H48	175	541617	4	0,92
LKd 190H48	190	541619	4	0,87
LKd 240H48	240	541624	4	1,11
LKd 340H48	340	541634	4	1,40

Connected products:

							
KN Underfloor Trunking	KNd Underfloor Trunking 2 Comp.	KNt Underfloor Trunking 3 Comp.	KKN 90° Horizontal Bend	KKNd 90° Horizontal Bend 2 Comp.	KKNt 90° Horizontal Bend 3 Comp.	KKNM 45° Horizontal Bend	KKNMd 45° Horizontal Bend 2 Comp.
							
KKNMt 45° Horizontal Bend 3 Comp.	TKN Horizontal Tee	CZKN Horizontal Cross-over	LK Vertical Bend	LKt Vertical Bend 3 Comp.	RKN Straight Reducer	RKNd Straight Reducer 2 Comp.	RKNt Straight Reducer 3 Comp.