

PTJ... Perforated Steel Band

Overview:

Application

Suspending installation components, installing all range of cable grips. Used as an earthing element indoors


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

L- powder coating in a full range of colours to 3m long (PC)

Important! In case of large quantity orders cut-to-length services available for any sections up to 6m long.

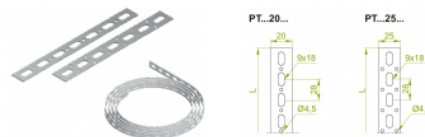

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Maximum load F _{max} [kN]	Weight [1m]	Dĺžka rolky [m]
PTJ20/25	20	640825	0,70	0,12	25
PTJ20/50	20	640850	0,70	0,12	50
PTJ25/25	25	640925	1,00	0,15	25
PTJ25/50	25	640950	1,00	0,15	50

Connected products:

