

PZC... Assembly Plate

Overview:

Application

A nut protecting channels against unbending, allowing the use of brackets to install with channels.

Material for PZC40, PZC100

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


Material for PZC50, PZC100/50

Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

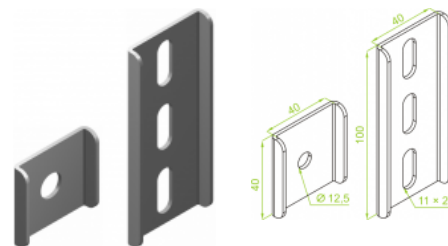

Versions:

Symbol	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
PZC40	40	750300	100	40	0,03
PZC100	40	750400	100	100	0,09
PZC50	50	750301	100	50	0,05
PZC100/50	50	750401	100	100	0,14