

ELBJ...H42 Adjustable Vertical Bend Element

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

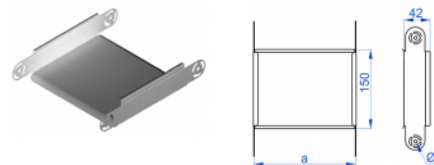

For installation use Screw Sets SGK M6×10 or SG M6×10.

Possibility of creating adjustable vertical bends of any internal radius through adding up bend elements

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELBJ50H42	50	142504	4	0,27
ELBJ100H42	100	142704	4	0,35
ELBJ150H42	150	142904	4	0,43
ELBJ200H42	200	143004	4	0,52
ELBJ300H42	300	143204	4	0,68
ELBJ400H42	400	148004	4	0,78
ELBJ500H42	500	148104	4	0,94
ELBJ600H42	600	148204	4	1,12

Connected products:

