

WTL... Bracket

Overview:

Application

Application
Supporting cable trays and ladders, pipes, and other systems' components, particularly where installation of cable runs is space restricted (e.g. above a suspended ceiling)


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

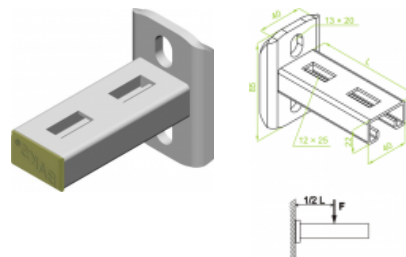

IMPORTANT! Non-standard lengths of brackets available to special order

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load F _{max} [kN]
WTL100	115	710810	50	0,24	1,90
WTL150	165	710815	50	0,29	1,80
WTL200	215	710820	50	0,38	1,70
WTL300	315	710830	30	0,52	1,30
WTL400	415	710840	30	0,65	1,00
WTL500	515	710850	30	0,79	0,80