


WC... Side Holder

Overview:

Application
Suspending cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

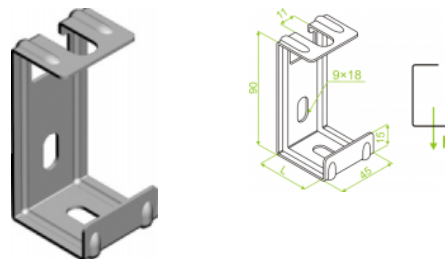

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WC30	32	730204	100	102	0,08	0,30
WC40	42	730104	100	88	0,09	0,25
WC50	52	730304	100	78	0,10	0,22