

## WSS... Bracket

### Overview:

#### Application

Suspending cable runs

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

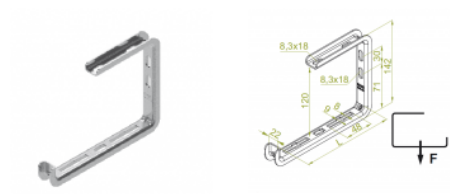

### Versions:

| Symbol | Length L [m] | Catalogue number | Quantity in box | Weight 1 pc. | Maximum load<br>Fmax[kN] |
|--------|--------------|------------------|-----------------|--------------|--------------------------|
| WSS50  | 70           | 720205           | 100             | 0,13         | 0,40                     |
| WSS100 | 120          | 720210           | 100             | 0,18         | 0,30                     |
| WSS150 | 170          | 720215           | 100             | 0,22         | 0,22                     |
| WSS200 | 220          | 720220           | 100             | 0,25         | 0,17                     |