

## WU/WUO... Variable Bracket

### Overview:

#### Application

Supporting cable trays and ladders, pipes, and other systems' components

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

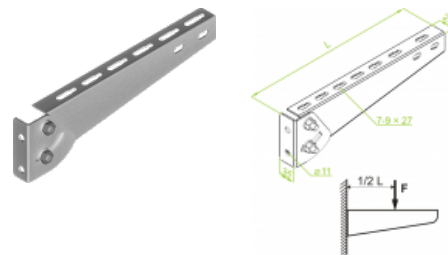

### Versions:

| Symbol    | Length L [m] | Catalogue number | Quantity in box | Weight 1 pc. | Maximum load<br>F <sub>max</sub> [kN] |
|-----------|--------------|------------------|-----------------|--------------|---------------------------------------|
| WU/WUO100 | 145          | 805210           | 50              | 0,22         | 1,00                                  |
| WU/WUO200 | 245          | 805220           | 50              | 0,34         | 0,85                                  |
| WU/WUO300 | 345          | 805230           | 30              | 0,45         | 0,70                                  |
| WU/WUO400 | 445          | 805240           | 20              | 0,64         | 0,55                                  |
| WU500     | 545          | 805250           | 20              | 0,79         | 0,45                                  |
| WU600     | 645          | 805260           | 20              | 0,94         | 0,30                                  |