

KKMPP/KKMPPOP...H60 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.


Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

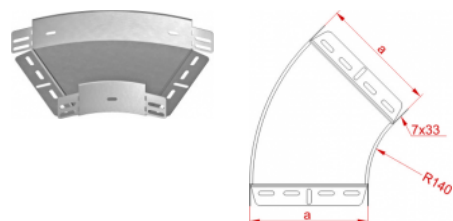

To join the sections up use with the following widths:

- for 100-200mm range - min 12 sets of screw,

- for 300-400mm range - min 14 sets of

Screw SGN M6×12 or SGN M6×12 E

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPP/KKMPPOP100H60	100	162214	20	0,51
KKMPP/KKMPPOP200H60	200	162314	10	0,89
KKMPP/KKMPPOP300H60	300	162414	10	1,36
KKMPP/KKMPPOP400H60	400	162514	10	1,93
KKMPP/KKMPPOP500H60	500	162614	10	2,58
KKMPP/KKMPPOP600H60	600	162714	10	3,33

Connected products:



SGN Screw Set