

WMCOE Bracket

Overview:

APPLICATION

Installing cable trays and ladders

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For wall-mount application use 2 sets of PSRO M10×80 or PSRO M10×80 E

To add components to the assembly on support channel use 2 sets of SM M10×20


For the installation of:

- cable trays - use sets of SGN M6×12 or SGN M6×12 E

- cable ladders - use 2 pieces of Hold-Down Clamp ZMO or ZMO E with

2 sets of SGN M8×14 or SGN M8×14 E


- wire mesh cable trays - use 2 pieces of Clamping Piece ZSO

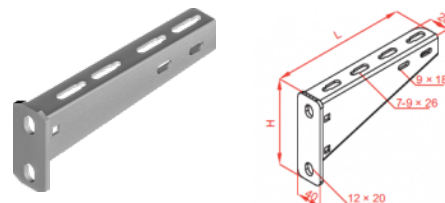

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WMCO100 E	115	800311	50	85	0,22	3,80
WMCO200 E	215	800321	50	85	0,36	3,50
WMCO300 E	315	800331	20	110	0,43	3,20
WMCO400 E	415	800341	20	110	0,83	3,10

Connected products:

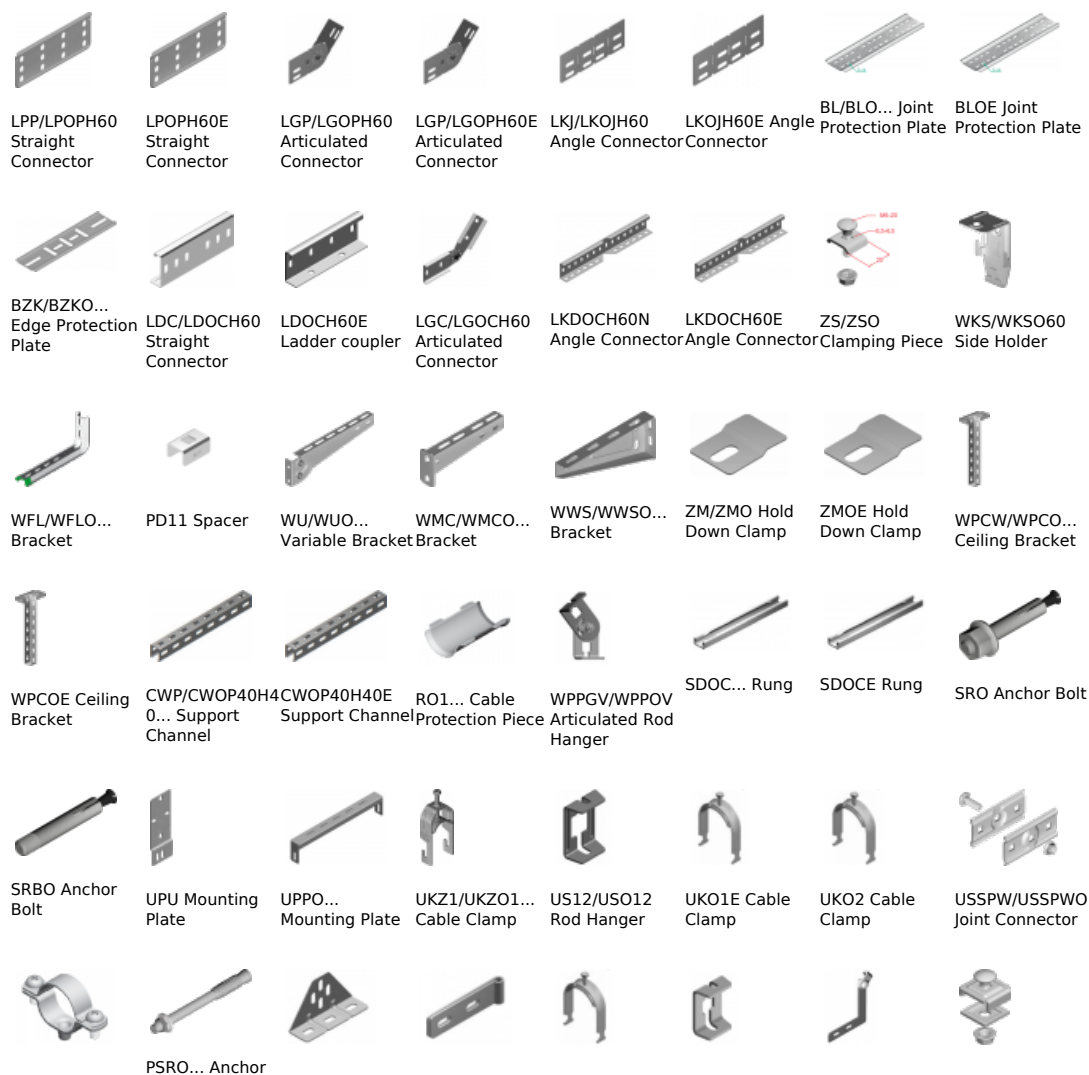

KSA... Cable Clip Bolt



USOVE Rod Hanger



PGM... Threaded Rod



WPPOVE Articulated Rod Hanger

UTM/UTMO Fastening Bracket



SGN Screw Set




SB50... Concrete Screw

UNPO Fire partition-versatile

UPW/UPWO Rod Grip



SM... Screw Set



KWBO... Nail Anchor

GSO... Ceiling Nail



GSO... Ceiling Nail

USV/USOV Rod Hanger



PP... Washer




KSKO... Hollow - Ceiling Anchor




UPWK/UPWKO Rod Grip



PW... Washer



PYRO-SAFE KS1 Intumescent Fire Protection Coating



USSN/USSO Joint Connector



NLM Rod Connector



FLAMMOTECT-K S1 Endothermic, Weather Resistant Fire Protection Coating

