

KZKS...H68 External Bend


Overview:

Application
Indoor cable routing for power, voice, and data services

Material
Electro-galvanised steel (EGS) to PN-EN 10152 Paint-finished – white to RAL9010 or grey to RAL 7035

Available to order:
L – powder coating in a full range of colours (PC)

Note: Cover included

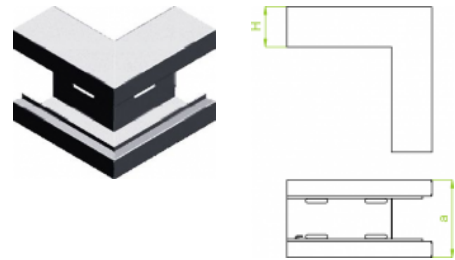

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KZKS115H68	115	960311	8	68	0,65
KZKS130H68	130	960313	8	68	0,70
KZKS170H68	170	960317	6	68	0,80

Connected products:

							
KPKS...H68 90° Elbow	KPKSd215H68 90° Elbow 2 Comp.	KS...H68 Wall Trunking	KSd215H68 Wall Trunking 2 Comp.	PKS Cover for Wall Trunking	KWKS...H68 Internal Bend	KWKSd215H68 Internal Bend 2 Comp.	KZKSd215H68 External Bend 2 Comp.
							
TSKS...H68 Tee	TSKSd215H68 Tee 2 Comp.	ZK...H68 Blind End	LKSH68 Notched Connector				