

KLL75H60 Cable Tray

Overview:

APPLICATIONS

Installation of light systems.

MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F - steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304), (only 3m)

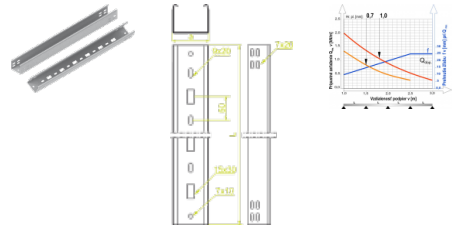

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
KLL75H60/3	3000	75	160107	4	60	1,12
KLL75H60/6	6000	75	160207	4	60	1,12

Connected products:



PGM Threaded Rod



WLS Hanger



WSL Hanger



NS... Nut



LSL...H60 Connector



LPLH60 Spojka žľabu