

## LSL...H60 Connector

### Overview:

**Application**


Joining cable routes.

**Material**

 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)  
 Paint-finished - white to RAL9010

**Available to order:**

L - powder coating in a full range of colours (PC)

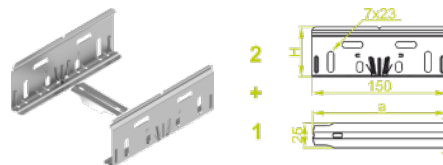

### Versions:

 Sheet thickness: **1,0 mm**

| Symbol           | Width a [mm] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. |
|------------------|--------------|------------------|-----------------|---------------|--------------|
| <b>LSL75H60</b>  | <b>75</b>    | <b>163207</b>    | <b>50</b>       | <b>60</b>     | <b>0,11</b>  |
| <b>LSL120H60</b> | <b>120</b>   | <b>163312</b>    | <b>50</b>       | <b>60</b>     | <b>0,14</b>  |

### Connected products:



PGM Threaded Rod