

WBC... Channel Hanger

Overview:

Application


Suspending cable routes
Rod Centre Hanger WBC 40 will
suit support channels:
CWD40H22, CWP40H22, CWC40H22,
CWD40H35, CWP40H35, CWC40H35,
CWD40H40, CWP40H40, CWC40H40,
CWD40H47, CWP40H47, CWC40H47,
CMD40H22, CMP40H22, CMC40H22,
CMD40H30, CMP40H30, CMC40H30,
CMD40H40, CMP40H40, CMC40H40,
CMD40H60, CMP40H60, CMC40H60,
Rod Centre Hanger WBC 50 will
suit support channels:
CMD50H30, CMP50H30, CMC50H30,
CMD50H50, CMP50H50, CMC50H50,
Rod Centre Hanger WBC 50

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN
10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

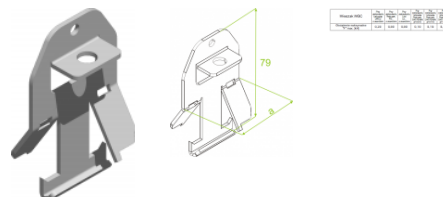

Versions:

Sheet thickness: **1,5 mm**

Symbol	Catalogue number	Quantity in box	Weight 1 pc.	Size a [mm]
WBC40	730102	100	0,04	47
WBC50	730103	100	0,04	57

Connected products:



LCM50H50 Channel Connector



FCA Zinc Spray