

WFCS... C-Bracket

Overview:

Application


Suspending wire mesh cable trays.

Material

Steel, galvanized, acc. to the manufacturer's standard
to DIN EN ISO 9001:2015 & ISO 14001:2015.

Available finishes

• Standard: Steel (ZnO)
• Galvanized (ZnO)

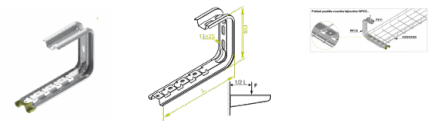

NOTE: C-Bracket WFC may be used in combination with Splice Washer Kit ZS to substitute other system components.

NOTE: C-Bracket WFC may be used in combination with Splice Washer Kit ZS to substitute other system components.

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.	Maximum load Fmax[kN]
WFCS100	170	900810	20	180	0,47	0,85
WFCS150	224	900815	20	180	0,70	0,15
WFCS200	270	900820	20	180	0,60	0,50
WFCS300	370	900830	20	180	0,73	0,30
WFCS400	470	900840	20	180	0,86	0,23
WFCS500	574	900850	20	180	1,42	0,14
WFCS600	674	900860	20	180	1,62	0,10

Connected products:

