

BDSC Ladder Side

Overview:

Application

Used in DIY install of Cable Ladders together with the rungs; at limited-access locations

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

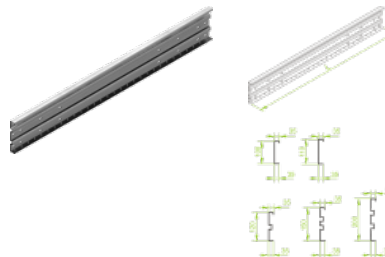

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight [1m]
BDSCH100/3	3000	400103	2	100	2,72
BDSCH100/6	6000	400203	2	100	2,72
BDSCH110/3	3000	410203	2	110	2,88
BDSCH110/6	6000	410303	2	110	2,88
BDSCH120/3	3000	420203	2	120	3,33
BDSCH120/6	6000	420303	2	120	3,33
BDSCH150/3	3000	470203	2	150	4,10
BDSCH150/6	6000	470303	2	150	4,10
BDSCH200/3	3000	490203	2	200	4,90
BDSCH200/6	6000	490303	2	200	4,90

Connected products:



SCP... Rung