

## LPDC...H120N Adjustable Vertical Bend

### Overview:

#### Application

Diversion in cable routing

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

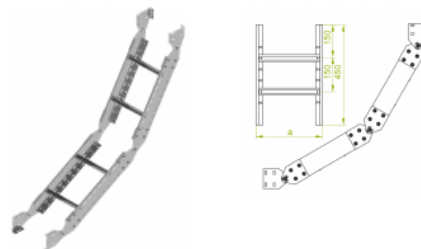

### Versions:

Sheet thickness: **2,0 mm**

| Symbol              | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------------|--------------|------------------|-----------------|--------------|
| <b>LPDC100H120N</b> | <b>100</b>   | <b>484910</b>    | <b>2</b>        | <b>8,91</b>  |
| <b>LPDC200H120N</b> | <b>200</b>   | <b>484920</b>    | <b>2</b>        | <b>9,42</b>  |
| <b>LPDC300H120N</b> | <b>300</b>   | <b>484930</b>    | <b>2</b>        | <b>9,95</b>  |
| <b>LPDC400H120N</b> | <b>400</b>   | <b>484940</b>    | <b>2</b>        | <b>10,70</b> |
| <b>LPDC500H120N</b> | <b>500</b>   | <b>484950</b>    | <b>2</b>        | <b>10,95</b> |
| <b>LPDC600H120N</b> | <b>600</b>   | <b>484960</b>    | <b>2</b>        | <b>11,47</b> |