

KGR...H60 Cable Tray

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
L- powder coating in a full range of colours (PC)




Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

Versions:

Sheet thickness: 0,5 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KGR50H60/3	3000	50	160224	12	0,67	2900
KGR100H60/3	3000	100	161516	6	0,84	5800
KGR150H60/3	3000	150	161616	6	1,01	8800
KGR200H60/3	3000	200	161716	6	1,18	11800
KGR300H60/3	3000	300	161816	4	1,88	17800

Connected products:

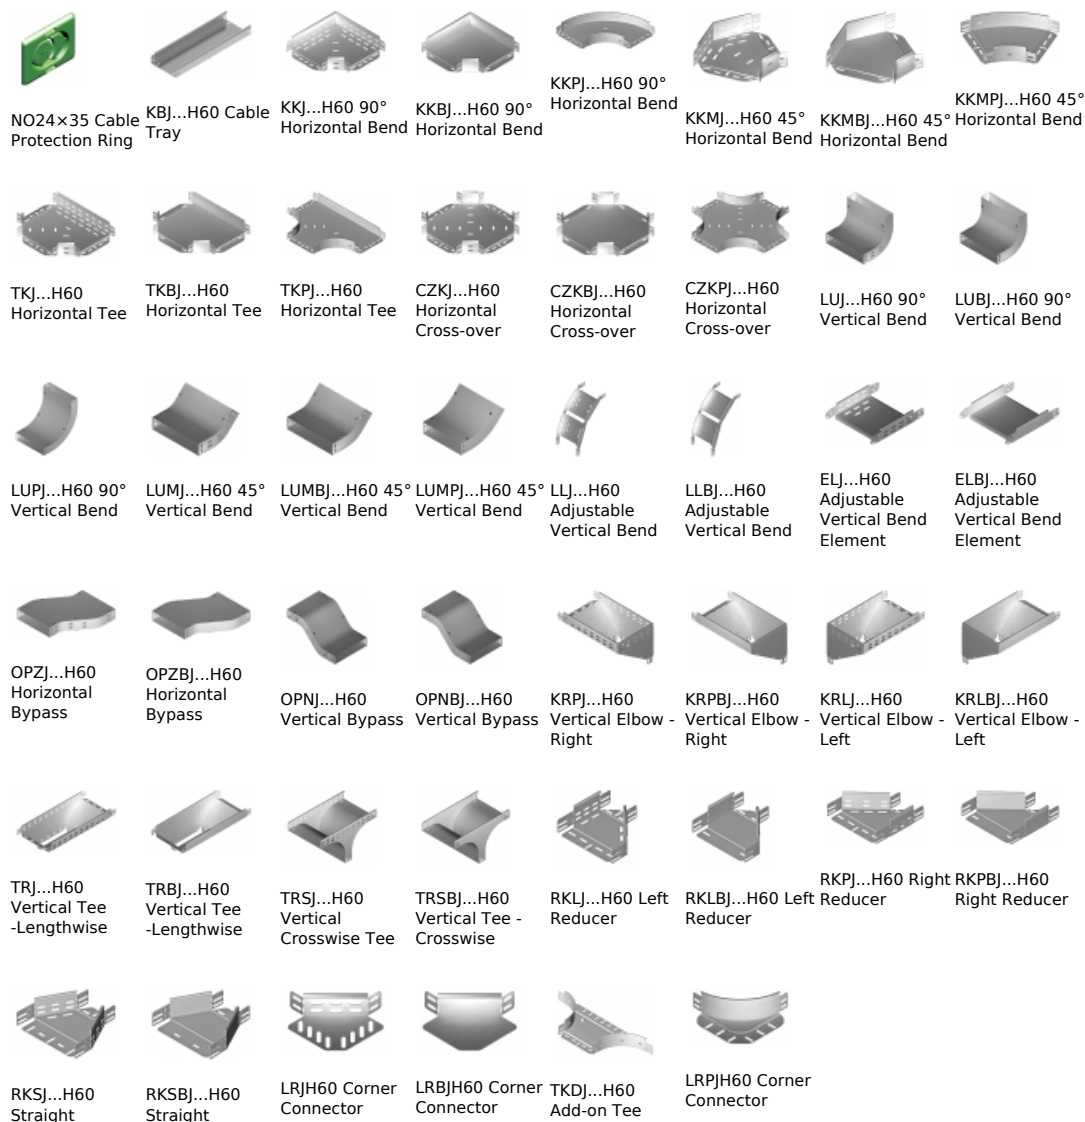

Reducer Reducer