


KGL...H110 Cable tray

Overview:

- Application**
 Cable routing
- Material**
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)
- Available to order:**
 L- powder coating in a full range of colours (PC)

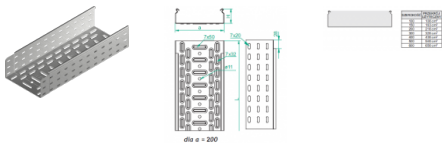

Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

Versions:

Sheet thickness: **0,7 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KGL100H110/3	3000	100	120110	4	1,67	10800
KGL150H110/3	3000	150	120115	4	1,94	16300
KGL200H110/3	3000	200	120120	4	2,19	21800
KGL300H110/3	3000	300	120130	2	2,68	32800
KGL400H110/3	3000	400	120140	2	3,18	43800
KGL500H110/3	3000	500	120150	2	3,68	54800
KGL600H110/3	3000	600	120160	2	4,18	65800