


KGJ...H110 Cable Tray

Overview:

- Application**
 Cable routing

Material
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
 L- powder coating in a full range of colours (PC)

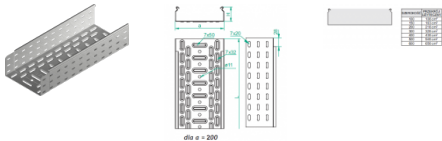

Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KGJ100H110/3	3000	100	120210	4	2,34	10800
KGJ100H110/6	6000	100	120211	4	2,34	10800
KGJ150H110/3	3000	150	120215	4	2,68	16300
KGJ150H110/6	6000	150	120216	4	2,68	16300
KGJ200H110/3	3000	200	120220	4	3,01	21800
KGJ200H110/6	6000	200	120221	4	3,01	21800
KGJ300H110/3	3000	300	120230	2	3,68	32800
KGJ300H110/6	6000	300	120231	2	3,68	32800
KGJ400H110/3	3000	400	120240	2	4,34	43800
KGJ400H110/6	6000	400	120241	2	4,34	43800
KGJ500H110/3	3000	500	120250	2	5,01	54800
KGJ500H110/6	6000	500	120251	2	5,01	54800
KGJ600H110/3	3000	600	120260	2	5,67	65800
KGJ600H110/6	6000	600	120261	2	5,67	65800