

KKJ...H110 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

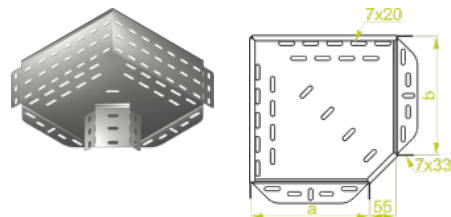

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions a and b.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKJ100H110	100	122110	10	0,55
KKJ150H110	150	122115	10	0,74
KKJ200H110	200	122120	10	1,08
KKJ300H110	300	122130	4	1,84
KKJ400H110	400	122140	4	2,54
KKJ500H110	500	122150	2	3,36
KKJ600H110	600	122160	2	4,46