

KKMJ...H110 45° Horizontal Bend

Overview:

Application

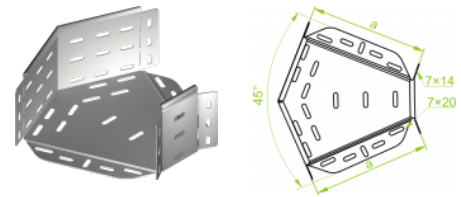
Diversions in cable routing.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

 Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMJ100H110	100	122310	10	0,40
KKMJ150H110	150	122315	10	0,52
KKMJ200H110	200	122320	10	0,75
KKMJ300H110	300	122330	4	1,29
KKMJ400H110	400	122340	4	1,84
KKMJ500H110	500	122350	2	2,35
KKMJ600H110	600	122360	2	3,12