

KKMP...H110 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

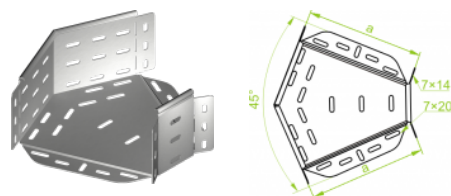

For installation use Screw Sets **SGK M6×12** or **SG M6×12**.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMP100H110	100	122410	10	0,60
KKMP150H110	150	122415	10	0,80
KKMP200H110	200	122420	10	1,12
KKMP300H110	300	122430	4	1,83
KKMP400H110	400	122440	4	2,78
KKMP500H110	500	122450	2	3,50
KKMP600H110	600	122460	2	4,74