

TRBJ...H110 Vertical Tee -Lengthwise

Overview:

Application

Branching out cable routes. Transition of tray cable run from the horizontal to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

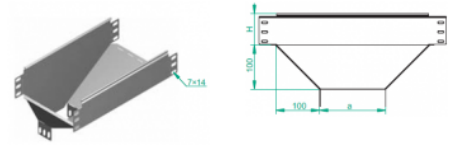

For installation use Screw Sets SGK M6×12 or SG M6×12.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TRBJ100H110	100	128510	4	1,26
TRBJ150H110	150	128515	4	1,91
TRBJ200H110	200	128520	4	2,46
TRBJ300H110	300	128530	2	3,83
TRBJ400H110	400	128540	2	5,08
TRBJ500H110	500	128550	1	6,00
TRBJ600H110	600	128560	1	6,70