

LZLP...H50 Adjustable Vertical Bend

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**To install adjustable vertical bend use sets of Screw SGF
M6x12**

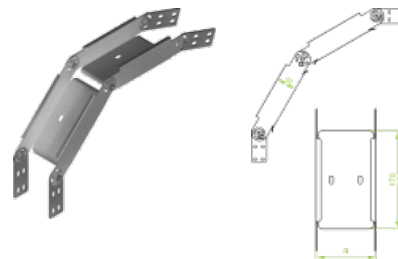

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZLP50H50	50	353005	10	1,96
LZLP100H50	100	353010	10	2,16
LZLP200H50	200	353020	10	2,57
LZLP300H50	300	353030	4	2,97
LZLP400H50	400	353040	4	3,38
LZLP500H50	500	353050	4	4,39
LZLP600H50	600	353060	4	5,45