

LZLP...H100 Adjustable Vertical Bend

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend use sets of Screw SGF M8x14

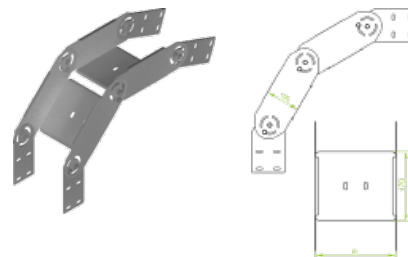

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZLP100H100	100	313010	10	4,07
LZLP200H100	200	313020	10	4,48
LZLP300H100	300	313030	4	4,88
LZLP400H100	400	313040	4	5,28
LZLP500H100	500	313050	4	5,69
LZLP600H100	600	313060	4	6,10