

LZLC...H100 Adjustable Vertical Bend

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend use sets of Screw SGF M8x14

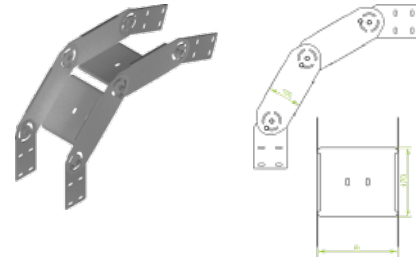

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZLC100H100	100	313110	10	4,56
LZLC200H100	200	313120	10	5,11
LZLC300H100	300	313130	4	5,64
LZLC400H100	400	313140	4	6,17
LZLC500H100	500	313150	4	6,72
LZLC600H100	600	313160	4	7,26