

LLKSC...H100 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

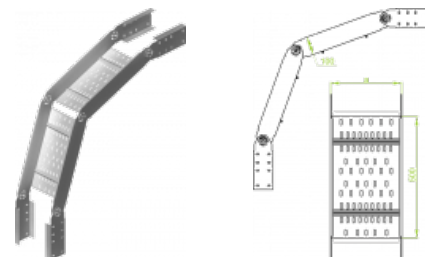

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKSC200H100	200	221622	10	8,64
LLKSC300H100	300	221632	4	9,17
LLKSC400H100	400	221642	4	9,64
LLKSC500H100	500	221652	4	10,12
LLKSC600H100	600	221662	4	10,59