

LLKST...H100 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

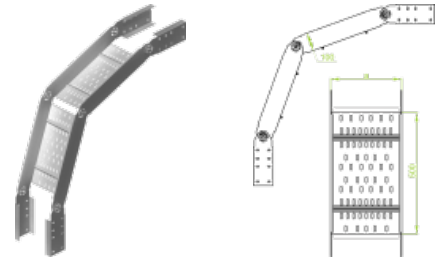

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKST200H100	200	221623	10	12,77
LLKST300H100	300	221633	4	13,37
LLKST400H100	400	221643	4	13,97
LLKST500H100	500	221653	4	14,57
LLKST600H100	600	221663	4	15,17