

KKSMT...H110 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

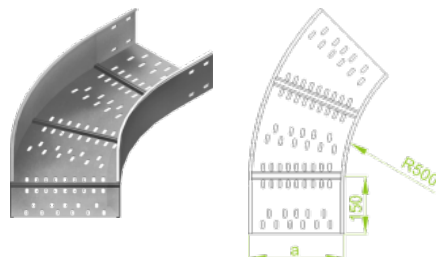

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMT200H110	200	230823	2	7,54
KKSMT300H110	300	230833	2	9,13
KKSMT400H110	400	230843	2	10,87
KKSMT500H110	500	230853	2	12,71
KKSMT600H110	600	230863	2	14,48