

LWKSM...H120 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings
LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.
FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

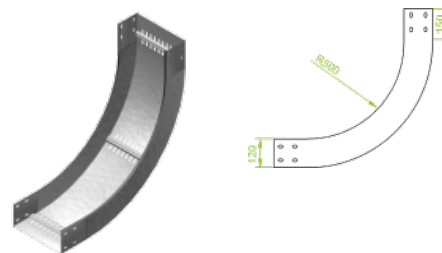

Versions:

Sheet thickness: 2,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSM200H120	200	241123	2	10,86
LWKSM300H120	300	241133	2	12,06
LWKSM400H120	400	241143	2	13,02
LWKSM500H120	500	241153	2	14,52
LWKSM600H120	600	241163	2	15,88