

LLKSC...H120 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

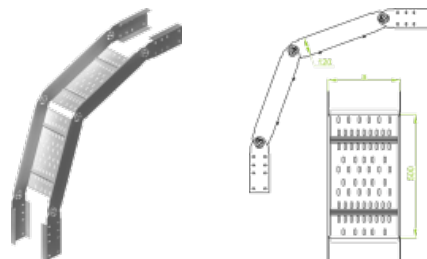

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKSC200H120	200	241622	10	10,70
LLKSC300H120	300	241632	4	11,30
LLKSC400H120	400	241642	4	11,81
LLKSC500H120	500	241652	4	12,42
LLKSC600H120	600	241662	4	12,91