

LLKST...H120 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

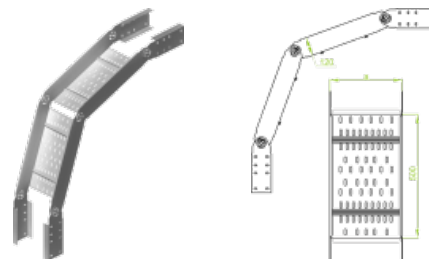

Versions:

Sheet thickness: **2,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKST200H120	200	241623	10	15,54
LLKST300H120	300	241633	4	16,19
LLKST400H120	400	241643	4	16,74
LLKST500H120	500	241653	4	17,40
LLKST600H120	600	241663	4	17,94