

LLKSC...H150 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

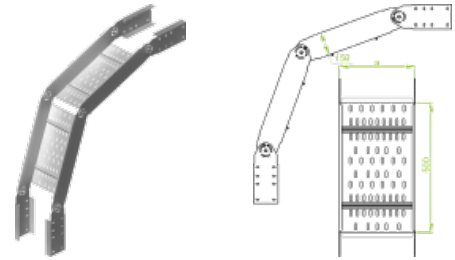

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKSC200H150	200	271622	10	14,02
LLKSC300H150	300	271632	4	14,62
LLKSC400H150	400	271642	4	15,13
LLKSC500H150	500	271652	4	15,73
LLKSC600H150	600	271662	4	16,23