

LLKSC...H200 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

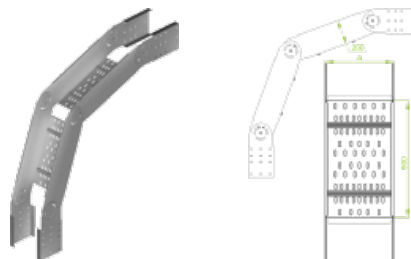

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKSC200H200	200	281622	10	17,34
LLKSC300H200	300	281632	4	17,94
LLKSC400H200	400	281642	4	18,45
LLKSC500H200	500	281652	4	19,05
LLKSC600H200	600	281662	4	19,55