

TDST...H110 Horizontal Tee

Overview:

Application

Branching out cable runs

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


Fittings of any internal radius available upon request.

For joining fittings to cable ladder lengths use Straight

Connector LSSU...

and sets of Screw SGKM8×16

In case of special orders please specify dimensions a and b.

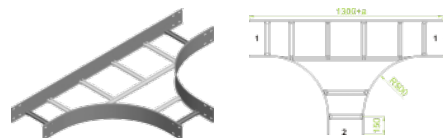

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TDST200H110	200	412623	1	12,89
TDST300H110	300	412633	1	14,16
TDST400H110	400	412643	1	15,19
TDST500H110	500	412653	1	16,79
TDST600H110	600	412663	1	17,96