

## LWDSM...H110 90° Vertical Bend - Internal

### Overview:

#### Application

Diversion in cable routing

#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)


**L**- powder coating in a full range of colours (PC)

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

#### FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

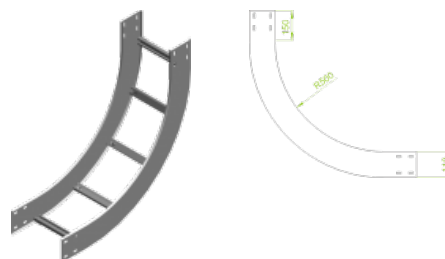

### Versions:

Sheet thickness: **2,5 mm**

| Symbol       | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| LWDSM200H110 | 200          | 412823           | 1               | 8,45         |
| LWDSM300H110 | 300          | 412833           | 1               | 8,84         |
| LWDSM400H110 | 400          | 412843           | 1               | 9,22         |
| LWDSM500H110 | 500          | 412853           | 1               | 9,60         |
| LWDSM600H110 | 600          | 412863           | 1               | 9,99         |