

## LZDSM...H200 90° Vertical Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)


**L**- powder coating in a full range of colours (PC)

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

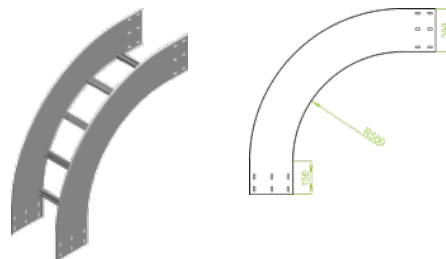

### Versions:

Sheet thickness: 2,5 mm

| Symbol       | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| LZDSM200H200 | 200          | 434523           | 1               | 14,75        |
| LZDSM300H200 | 300          | 434533           | 1               | 15,26        |
| LZDSM400H200 | 400          | 434543           | 1               | 15,58        |
| LZDSM500H200 | 500          | 434553           | 1               | 15,96        |
| LZDSM600H200 | 600          | 434563           | 1               | 16,35        |