

LLDSC...H200 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

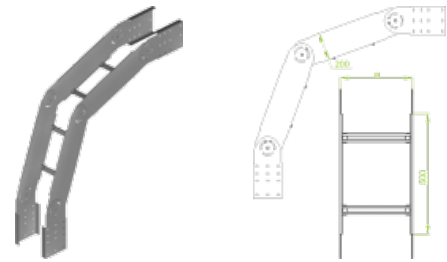

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDSC200H200	200	435622	10	17,07
LLDSC300H200	300	435632	4	17,55
LLDSC400H200	400	435642	4	18,02
LLDSC500H200	500	435652	4	18,50
LLDSC600H200	600	435662	4	18,98