

LPMPH50 Straight Connector

Overview:

Application

Connecting cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

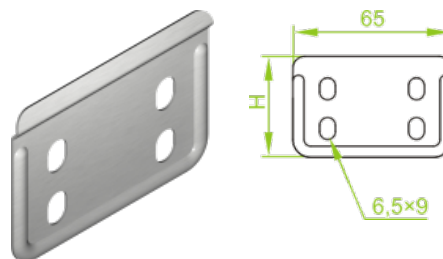

Use 4 Screw Sets SGK M6×10 or SG M6×10 to install

Connected products:

							
LUPJ...H50 90° Vertical Bend	OPZP...H50 Horizontal Bypass	OPZBJ...H50 Horizontal Bypass	OPZBP...H50 Horizontal Bypass	OPNJ...H50 Vertical Bypass	OPNP...H50 Vertical Bypass	OPNBj...H50 Vertical Bypass	OPNBp...H50 Vertical Bypass
							
TRSJ...H50 Vertical Tee - Crosswise	TRSP...H50 Vertical Tee - Crosswise	TRSBj...H50 Vertical Tee - Crosswise	OPZJ...H50 Horizontal Bypass	LUMPP...H50 45° Vertical Bend	LUP...H50 90° Vertical Bend	LUBj...H50 90° Vertical Bend	LUBp...H50 90° Vertical Bend
							
LUPJ...H50 90° Vertical Bend	LUPP...H50 90° Vertical Bend	LUMJ...H50 45° Vertical Bend	LUMP...H50 45° Vertical Bend	LUMBj...H50 45° Vertical Bend	LUMBP...H50 45° Vertical Bend	LUMPJ...H50 45° Vertical Bend	TRSBP...H50 Vertical Tee - Crosswise