

## UC... Beam Clamp

### Overview:

**Application**

Suspending cable routes


**Material**

Steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**Available to order:**

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

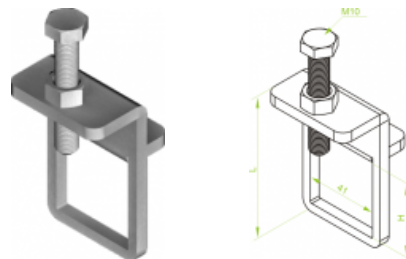

### Versions:

| Symbol | Length L [m] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. | Maximum load Fmax[kN] |
|--------|--------------|------------------|-----------------|---------------|--------------|-----------------------|
| UC22   | 62           | 752401           | 100             | 23            | 0,15         | 2,00                  |
| UC40   | 80           | 752402           | 50              | 41            | 0,16         | 2,00                  |
| UC60   | 100          | 752403           | 50              | 61            | 0,17         | 2,00                  |