

DDM...H55 Vertical Cable Ladder


Overview:

Application
Routing cable runs of various types in the vertical plane.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel to 3m lengths (SS)
L- powder coating in a full range of colours (PC)

Note:
Rungs of cable ladders installed on both sides.
Alternative cable installation in Cable Clamps UK... on both sides of the ladder.

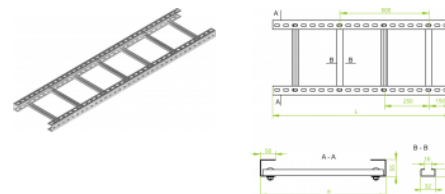

Versions:

Sheet thickness: **3,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
DDM200H55/3	3000	200	403520	1	6,62
DDM200H55/6	6000	200	403620	1	6,62
DDM300H55/3	3000	300	403530	1	7,14
DDM300H55/6	6000	300	403630	1	7,14
DDM400H55/3	3000	400	403540	1	7,66
DDM400H55/6	6000	400	403640	1	7,66
DDM500H55/3	3000	500	403550	1	8,18
DDM500H55/6	6000	500	403650	1	8,18
DDM600H55/3	3000	600	403560	1	8,70
DDM600H55/6	6000	600	403660	1	8,70
DDM700H55/3	3000	700	403570	1	9,30
DDM700H55/6	6000	700	403670	1	9,30
DDM800H55/3	3000	800	403580	1	9,86
DDM800H55/6	6000	800	403680	1	9,86
DDM900H55/3	3000	900	403590	1	10,38
DDM900H55/6	6000	900	403690	1	10,38
DDM1000H55/3	3000	1000	403591	1	10,94
DDM1000H55/6	6000	1000	403691	1	10,94