

WWCT/WWCTO... Bracket

Overview:

APPLICATION

Installing cable trays and ladders


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

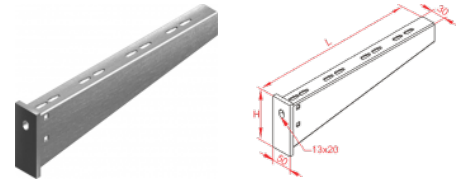

For wall-mount application use 1 set of PSRO M10×80

To add components to the assembly on support channel

use 1 set of SM

M10×30

For the installation of:

- cable trays - use sets of SGN M6×12

- cable ladders - use 2 pieces of Hold-Down Clamp ZMO

with 2 sets of SGN M8×14

- wire mesh cable trays - use 2 pieces of Clamping Piece

ZSO

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
WWCT/WWCTO200	220	713020	10	90	0,70
WWCT/WWCTO300	320	713030	8	110	0,95
WWCT/WWCTO400	420	713040	8	130	1,49